

YOU CAN RELAX IT'S A BRECO® LINEAR BELT

BRECO® Polyurethane linear drive belts are are available in pitch length multiples to any desired length over 100 metres.

- High linear, positional and angular accuracy
- · Slipless, synchronous operation
- · Constant length, no post elongation
- Extremely wear resistant
- Up to 98% efficient and maintenance free
- Belt speeds up to 80 m/sec
- Temperature ranges available from -25°C to +110°C, (dependent on special PU's)
- · Special chemical resistants available

BRECO® M


Open ended polyurethane timing belts are used extensively for linear drives replacing more expensive mechanical alternatives.

- Many high strength tension cord types available
- Reels can extruded in lengths up to 150m

BRECO® V

Joined timing belts are the ultimate in timing belt versatility. These joined belts are manufactured from lengths of BRECO® M.

- Heat welded interlocking fingers provide any length of timing belt
- Fast delivery schedule (typically 1 day)
- Ideal for long centre distances or non-standard lengths

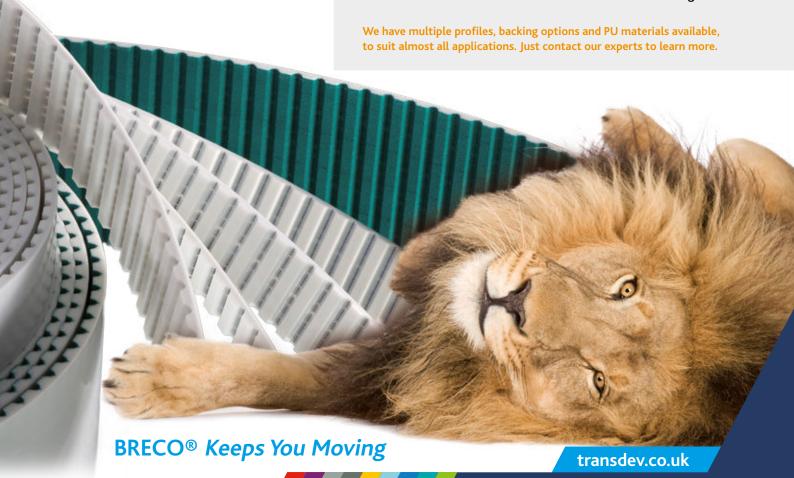

To order or for more information: T +44 (0)1202 675 555

PULLEYS
CHAIN
SPROCKET
LINES
LINES
PLASTICARS

